



## EASY HEAT-ASSISTED TOP ROLLER LAMINATOR

High-performing heat-assisted top roller laminator for self-adhesive materials. It allows laminating, mounting and encapsulating. Designed to be durable and robust for excellent and high quality finishing results.

### ✓ HIGH PRODUCTIVITY

Extremely fast: it works **up to 10 m/min** (33 ft/min) with great accuracy

### ✓ WORKING FLEXIBILITY

It applies double-sided adhesive films, application tape and protective film; it mounts images, also on extra wide format panels. Available in three sizes.

### ✓ EXTRA DEEPER WORKTOPS

In and out extra deep support surface for wider panels

### ✓ EASY TO USE CONTROL PANEL

User friendly control panel to set working parameters

### ✓ INTUITIVE PRESSURE CONTROL

Intuitive **LED display** that guarantees the correct working pressure avoiding the waste of material

### ✓ MADE IN ITALY


Designed and manufactured completely in Italy

### ✓ LONG-TERM RELIABILITY AND SAFETY

Solid frame construction. Built with components that assure reliability and safety for a long time

### SUITABLE FOR:

- > Rigid and flexible displays for indoor and outdoor
- > Floor graphics / Window graphics
- > Backlit displays
- > Trade shows graphics
- > Roll-up banners & Display pop-up
- > Table top displays
- > Protection films on boards (i.e. for furniture industry, plexiglas®, glass)
- > Car wrapping
- > Many more...

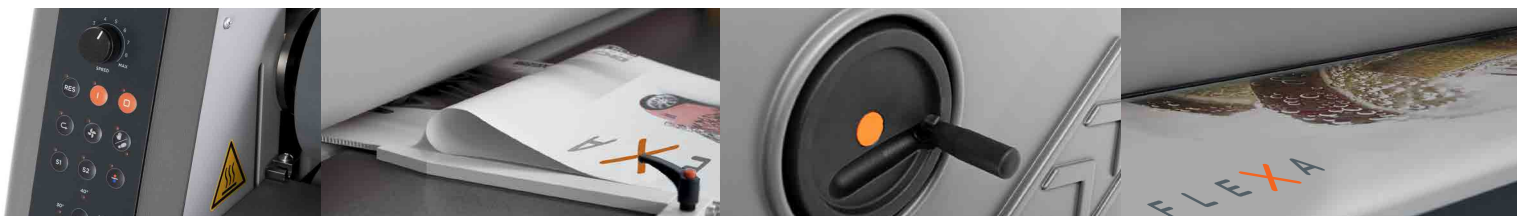



Motorized lifting of the upper roller (optional)



Electronically adjustable speed regulator




Aluminum shafts with automatic locking system



Front tray for prints (optional)



Roller pressure display

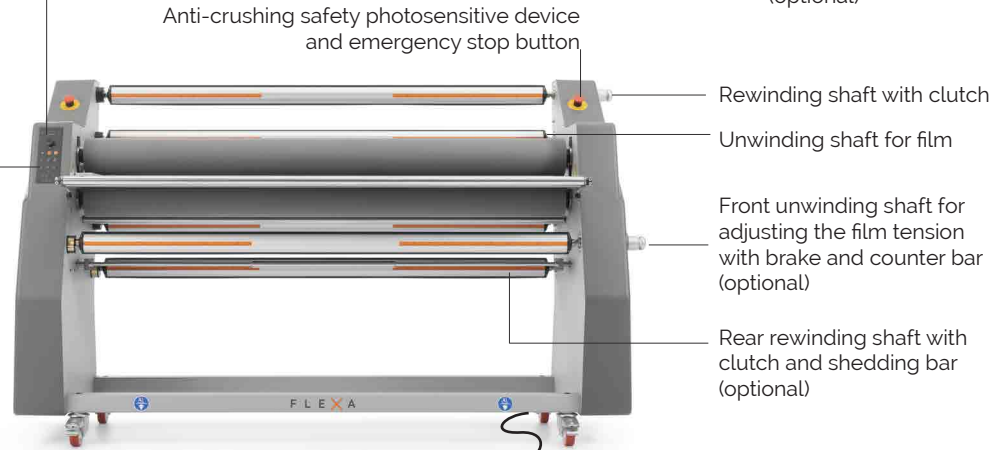

Anti-crushing safety photosensitive device and emergency stop button

Rewinding shaft with clutch

Unwinding shaft for film

Front unwinding shaft for adjusting the film tension with brake and counter bar (optional)

Rear rewinding shaft with clutch and shedding bar (optional)

Feeding command by control panel or foot switch (hands free operation)



Removable steel worktop for easy loading of materials  
Feed-in guide (optional)



Reference square with guide (optional)



Cutting bar with two knives (optional)

	EASY 110	EASY 160	EASY 210
Working width	1100 mm (43 in)	1600 mm (63 in)	2100 mm (83 in)
Max. space between rollers	40 mm (1,6 in)	40 mm (1,6 in)	40 mm (1,6 in)
Coated rubber rollers	Ø 130 mm (5,2 in)	Ø 130 mm (5,2 in)	Ø 130 mm (5,2 in)
Heated upper roller preset	30°, 40°, 50° C (86°, 104°, 122° F)	30°, 40°, 50° C (86°, 104°, 122° F)	30°, 40°, 50° C (86°, 104°, 122° F) Optional
Max. speed	10 m/min. (33 ft/min)	10 m/min. (33 ft/min)	10 m/min. (33 ft/min)
Working height	890 mm (36 in)	890 mm (36 in)	890 mm (36 in)
Power supply	230 V - 50/60 Hz - 2000 W	230 V - 50/60 Hz- 2900 W	230 V - 50/60 Hz -3500 W
Dimensions (W x D x H)	1650 x 800 x 1300 mm (65 x 32 x 51 in)	2050 x 800 x 1300 mm (81 x 32 x 51 in)	2500 x 800 x 1300 mm (99 x 32 x 51 in)
Weight	190 kg (418 lbs)	240 kg (530 lbs)	290 kg (640 lbs)
Packing dimensions (W x D x H)	2150 X 950 X 1600 mm (85 x 37 x 63 in)	2150 X 950 X 1600 mm (85 x 37 x 63 in.)	2650 x 1150 x 1600 mm (104 x 45x63 in)
Packing weight	290 kg (639 lbs)	340 kg (750 lbs)	480 kg (1058 lbs)



MDS Inovativne Tehnologije d. d.  
Leskoškova cesta 9e, 1000 Ljubljana



+386 1 586 79 33



www.mds-it.si



info@mds-it.si

